

YOKOGAWA 

WT1800

High Performance Power Analyzer

nbn
ELEKTRONIK AG

nbn Elektronik AG
Birmensdorferstrasse 30
CH-8142 Uitikon
Tel. +41 (0)44 404 34 34
Fax +41 (0)44 493 50 32
info@nbn-elektronik.ch
www.nbn-elektronik.ch



Broad Ranging Power Measurements with One Unit

Basic Power Accuracy	±0.1%
DC Power Accuracy	±0.05%
Voltage/Current Bandwidth	5 MHz*¹ (-3 dB, Typical)
Sampling Rate	2 MS/s (16-bit)
Input Elements	Max. 6
Current Measurement	100 μ A to 55 A
Fast data Capturing	5 ms Response *Max.1ms (When External Sync ON)

Innovative Functions Help Improve Measurement Efficiency

Motor, Inverter, Lighting, EV/HEV, Battery, Power Supply, Aircraft, New Energy, Power Conditioner

For more information, please visit.

tmi.yokogawa.com

Test & Measurement Instruments

 3-Year Warranty 

*1: Excluding direct current input with the 50 A input element

Bulletin WT1800-00EN

New WT1800 Precision Power Analyzer Offers High-performance, Wide-range, and 6 Power Inputs

New Functions Greatly Help Improve Measurement Efficiency



Many features are available that are a first in the power measurement industry*1

Measurement High-precision, wide-range, fast-sampling, simultaneous harmonic measurement

- 5-fold wider than previous model***
 - Voltage and current frequency bandwidth 5 MHz (-3 dB, typical)**
Faster switching frequencies increasingly require measurements in a wider range. The WT1800 provides a voltage and current frequency bandwidth (5 MHz) 5-fold wider than the previous measurement range and is capable of more correctly capturing fast switching signals.
- 2/3 of previous model***
 - Reduction of low power-factor error to 0.1% of apparent power (2/3 of previous model)**
A power-factor error is one of the important elements to ensure high-accuracy measurements even at a low power factor. The WT1800 has achieved a power-factor error (0.1%) that is 2/3 of the previous model, in addition to a high basic power accuracy of ±0.1%.
- Inheritance**
 - Wide voltage and current range allowing direct input**
Direct input of measurement signals makes it possible to measure very small current that can hardly be measured with a current sensor. The WT1800 provides a direct input voltage range from 1.5 V to 1000 V (12 ranges) and a direct input current range from 10 mA to 5 A (9 ranges) or from 1 A to 50 A (6 ranges).
- 5-fold wider than previous model***
 - 0.1 Hz low-speed signal power measurement and max. 50 ms high-speed data collection**
The frequency lower limit has been reduced to 0.1 Hz from the previous 0.5 Hz (5-fold lower than the previous model) to meet the requirement for power measurements at a low speed. Furthermore, high-speed data collection at a data update rate of up to 50 ms has been inherited. In addition to normal measurement data, up to the 500th order harmonic data can be measured and saved simultaneously. The data update rate can be selected from nine options from 50 ms to 20 s. * Harmonic measurement at the 50 ms data update rate is possible up to the 100th order.
- First in industry**
 - Particular voltage and current range selectable**
Wide voltage and current input ranges have the advantage of extending the measurement application range. However, the downside is that the response time of the auto range tends to slow down. A range configuration function solves this problem. Since only the selected range (effective measurement range) can be used, the range can be changed up or down more quickly.
- NEW**
 - msec response for transient phenomena analysis (/HS option)**
The /HS option provides fast data capturing with ms response.
Current WT series can measure three phase values like voltage, current and power every 50ms period correctly, however, 50ms data update rate is not enough for analyzing transient phenomena of motors and other devices recently.

For details, see Pages 5

For details, see Pages 11

* Comparison with Yokogawa's previous model WT1600

*1: Applicable to a general-purpose high-precision three-phase power analyzer as of February 2011 (according to Yokogawa's survey)

Support for Energy Conservation Technologies and Sustainable Energy Development

First in industry Dual Harmonic Measurement

The perspective of the efficient use of energy is boosting demand for inverters to convert 50 Hz or 60 Hz AC power to DC power, grid connection controllers to control reverse power flow occurring due to excess power, and battery chargers/dischargers.

The WT1800 is capable of simultaneously measuring the harmonic distortion of the input and output current of these devices. Challenging the common wisdom that "harmonic measurement is limited to a single line," the WT1800 is capable of performing two-line simultaneous harmonic measurements. The WT1800 is also capable of measuring up to the 500th order harmonic even at high fundamental frequencies such as a 400 Hz frequency.



For details, see Pages 5 and 6

First in industry Customize Display Screen

With Yokogawa's previous power analyzer model, you have to select numerical formats such as 4-value, 8-value, and 16-value view to display screens, so you cannot flexibly display a screen to view the desired parameter in the desired size and at the desired position.


The WT1800 has broken the mold and is capable of reading user-created image files (BMP) as display screens to allow viewing data in a flexible format. Thus the display screen can be customized in a more user-friendly and easy-to-read manner.



For details, see Pages 5

Many features are available that are a first in the power measurement industry*1

Rear panel

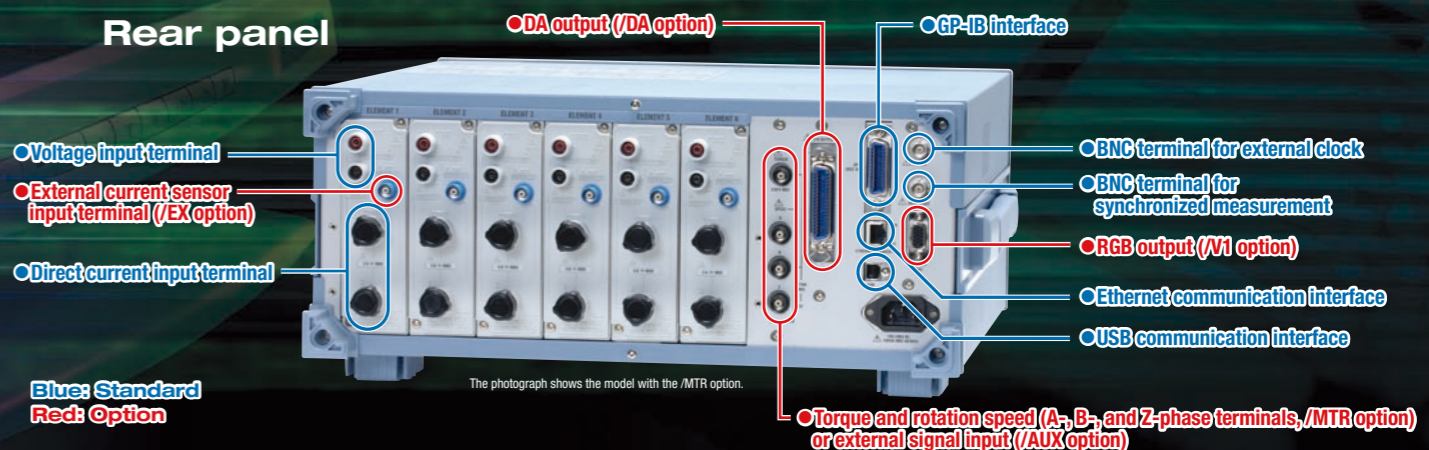

The photograph shows the model with the /MTR option.

Functions New functions greatly support power measurements

- First in industry**
 - Dual harmonic measurement (option)**
The industry's first two-line simultaneous harmonic measurement is available, in addition to simultaneous measurement of harmonic and normal measurement items such as voltage, current, and power values. Previously, harmonic measurements of input and output signals had to be performed separately. With the WT1800, harmonic measurements of input and output can be performed simultaneously.
- NEW**
 - Two-channel external signal input is available for power measurement and analog signal data measurement (option available in combination with the motor evaluation function)**
Power measurements can be performed together with physical quantity data such as solar irradiance or wind power in wind generation.
- NEW**
 - Electrical angle measurement is also supported. Motor evaluation function allowing A-phase, B-phase, and Z-phase inputs (option available in combination with external signal input)**
Pulse or analog signals can be input for rotation speed and torque signal measurements. The motor evaluation function of the WT1800 makes it possible to detect the rotation direction and measure the electrical angle, which is not possible with Yokogawa's previous model.

For details, see Pages 5 and 6

For details, see Page 9

For details, see Page 7

Saving/Communication A wide variety of communication and data saving functions

- First in industry**
 - User-defined event function**
For the first time in the high-precision power analyzer industry, an event trigger function is available to meet the requirement to capture only a particular event. For example, a trigger can be set for measured values that fall out of the power value range from 99 W to 101 W and only data that meets the trigger condition can be stored, printed, or saved to a USB memory device.
- GP-IB, Ethernet, and USB communication functions available as standard**

For details, see Pages 4 and 8

First in industry means functions and capabilities available for the first time in the high-precision three-phase power analyzers (according to Yokogawa's survey).

List of Available Functions

- Standard feature
- Option
- Software (sold separately)

Voltage range 1.5-1000V	Current range 1-50A 10mA-5A	External sense range 0.05-10V/EX	Power Frequency range 1MHz	Voltage/Current Frequency bandwidth 5MHz (typical)	Inputs 1,2,3,4,5,6	Basic Power Accuracy ±0.1%	Crest factor 300(6)	Display 8.4-XGA	Update rate 50ms-20s	Harmonic 100/100	Dual Harmonics 100/100
Delta Computation /DT	Add-on Frequency 12ch /FH	Motor Evaluation Speed Torque /MTR	Auxiliary Inputs Analog 2 inputs /IUS	USB memory	Internal Memory 32MB	Printer /PS	RGB /V1	Comm USB	Comm GP-IB	Comm Ethernet	Software WT Viewer 760122

All Data of 6-input, Single/Three-phase Devices can be Viewed on a Single Screen

Important Information is Displayed in a Concentrated Format on High Resolution 8.4-inch XGA Display

A high resolution display with a resolution about 2.6-fold higher than Yokogawa's previous model is employed. More setting information and measurement data can be displayed.

* Comparison with Yokogawa's previous model WT1600



A lot of information can be displayed on a single screen

Measurement data can be displayed on a single screen, along with the respective detailed setting information of 6 inputs, such as a voltage range, current range, synchronization source, wiring system, and filter. You do not need to switch display screens frequently to confirm the settings.


Data update rate changeable

With the WT1800, the data update rate can be selected from 9 options from the fastest data update rate of 50 ms to an update rate of 20 s for low-speed measurements. For example, if you want to save the average data at a 1-minute interval and inappropriately set the update rate of 50 ms, measurement results may be not correct because data can be saved only at a 1-minute interval (once every 20 times). Such a risk can be avoided by setting the update rate that is suited to the interval at which you want to save data.

Line filter

Capture an original signal masked by high frequency component

NEW

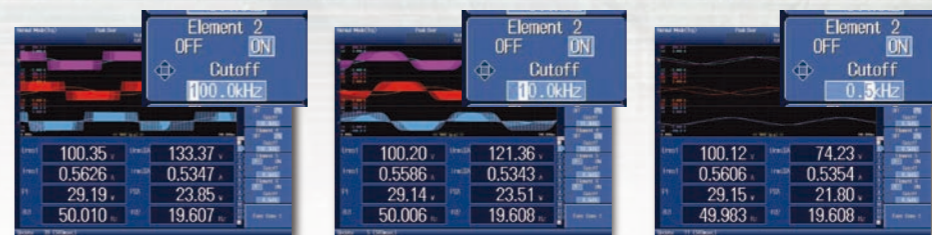


In power evaluation such as an inverter waveform and distorted waveform, measurement values are affected by high frequency component. A new digital filter function makes it possible to remove unnecessary high frequency components superimposed on signals. A filter can be independently set for each input element. An analog filter for 1 MHz/300 kHz, and digital filter that can be set from 100 Hz to 100 kHz in increments of 100 Hz are available as standard.

Range configuration function

High-speed range setting suited to input signals

NEW

A new range configuration function is available. It allows you to select a particular voltage and current input range (effective measurement range). Eliminating unnecessary ranges has made it possible to achieve optimal range setting that is faster than Yokogawa's previous model*. This allows more quicker tracking of signal changes. If the peak goes over the limit, you can switch to a preset range. This is effective in reducing the production time for a repeat test, such as setting to OFF, 100 V, OFF and so on, which is performed frequently on the production line.

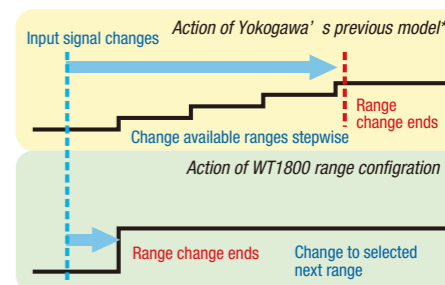

* Comparison with Yokogawa's previous model WT1600

A Wide Variety of Display Formats Ranging from Numerical to Custom Display

Numerical and harmonic bar graphs

NEW

Dual harmonic measurement




A harmonic measurement option (/G5) makes it possible to display both numerical data and bar graphs to help understand measurement data visually. In addition, a dual harmonic measurement function (/G6) makes it possible to measure and display two-line harmonic bar graphs (dual harmonic) simultaneously.

The /G5 or /G6 option is required

Waveform

NEW

Support for 6 split screen displays




A high resolution display makes it possible to split the waveform display into up to 6 split screens. This makes it possible to split the display of signals between the input and output of a three-phase inverter and display them simultaneously. Waveform display allows you to display waveforms for the voltage alone or the current alone, or arbitrarily set the display position, so you can also display only the signals you want to compare one above the other.

Computation range display

Innovative function

Direct display of primary current values

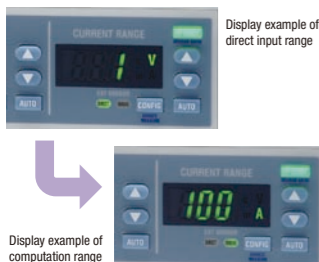


The setting ranges of voltage and current are usually displayed with voltage and current signal levels that are input to the power analyzer. The WT1800 provides not only this direct display but also added a new computation range display function to the external current sensor range. This function allows you to display the primary current range for the voltage output type current sensor. It allows you to intuitively set a range that is suited to the primary measurement signal level.

User-defined event function

Innovative function

Capture only a particular event



The data saving function of the WT Series is capable of continuously saving data for a long period of time. However, to check an irregular event, data must be retrieved using spreadsheet software. The event trigger function allows you to set the high and low limits and after trigger data that falls into or out of that range to be saved.

Individual null function

Innovative function

Function to reset only a particular input signal to zero




A null function allows you to reset the offset value to zero in the connected state. Previously, all inputs could only be collectively set to ON or OFF. With the WT1800, the null value for each input can be set to ON, HOLD, or OFF. In a motor evaluation test, the offset value for only a particular input can be reset to zero. This makes it possible to perform a more accurate motor evaluation test.

Help function

New function

Display the manual on the screen



Display the manual on the screen. Frequently used functions (keys) can be performed without the instruction manual. You may, however, want to use a new function during evaluation. The WT1800 includes a built-in instruction manual on the functions, so if a new operation is required, you can read the explanation of the function on the screen. You can switch it to another language menu of Chinese, German and Japanese.

English help menu supports measurement

Dual vector

NEW

Simultaneous two vector displays




Fundamental harmonic voltage and current signal phase vectors can be displayed. With Yokogawa's previous model, vector display is limited to a single line. With the WT1800, Dual vectors can be displayed. In addition, combination display of vectors and numerical values is also possible. This allows you to view the numerical parameters and voltage and current phase status visually.

The /G5 or /G6 option is required

Setting information

NEW

Combination display of Information and Numerical screens



The screen can be split into two, with one above the other, and two types of screens can be displayed simultaneously. Screen can be selected from Numerical, Waveform, Trend, Bar Graph, and Vector displays. Another new function allows you to press the INFO button on the Numerical screen to display the setting information in the upper row and automatically scale down the numerical information displayed in the lower row.

Trend

Capture efficiency changes visually



When evaluating inverter efficiency, sometimes small efficiency changes can hardly be recognized with just numerical values. Trend display makes it possible to display measurement values and measurement efficiency as trend data in time series to help capture even small changes visually. Trend data over several minutes or several days can be displayed.

*Trend display can be saved with the screen hardcopy function. To save numerical data, a store function is used.

Custom


NEW

Customize display screen




Image data can be loaded onto the screen and the position and size of the numerical data can be specified. The display screen can be customized so that the corporate logo of your company is displayed on the screen, or only the measurement items you want to view, such as input and output efficiency or frequency, are displayed one above the other.

*The data for the created screen needs to be loaded from a USB storage device.



Input/Output Efficiency Measurements of Inverters, Matrix Converters, Motors, Fans, and Pumps

*Also refer to the features of other applications.

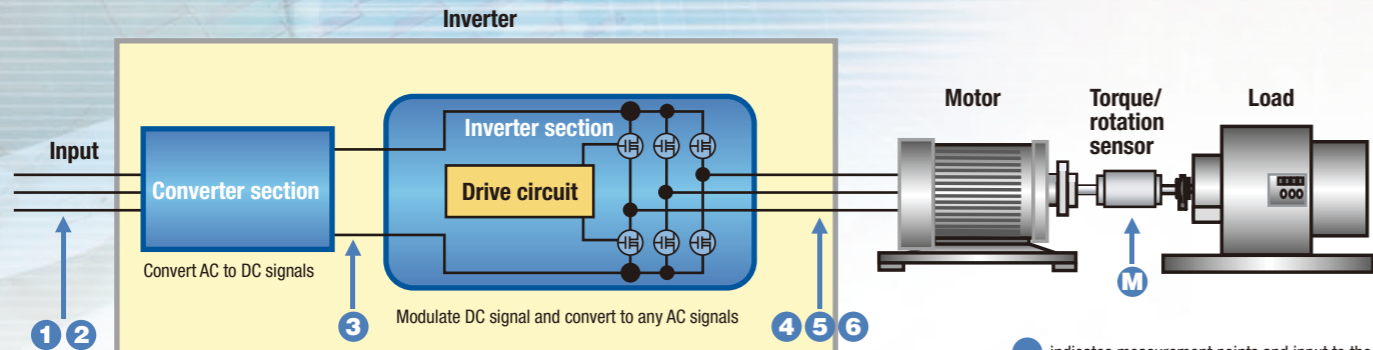

* With three-phase input, power is measured with the three-phase three-wire system.

* In this example, measurement is performed with the three-phase three-wire system (at 3V3A) to verify the (inter-phase) voltage and current of each phase.

● indicates measurement points and input to the power analyzer. M indicates connecting the motor output to the motor signal input (MTR) of the power analyzer

Overview

The WT1800 is capable of performing up to 6 power input measurements to make it possible to perform an inverter efficiency test between the input and output in inverter evaluation. In addition, a motor evaluation function (option) makes it possible to simultaneously monitor voltage, current, and power changes, as well as rotation speed and torque changes.


Advantages of WT1800

5 MHz range and 2 MS/s high-speed sampling

The vertical resolution in power measurements is one of the important elements for high-precision measurements. The WT1800 is capable of 16-bit high resolution and approximately 2 MHz sampling to make it possible to measure faster signals with higher precision.

Voltage/ current range 5 MHz

Approx. 2 MS/s 16-bit

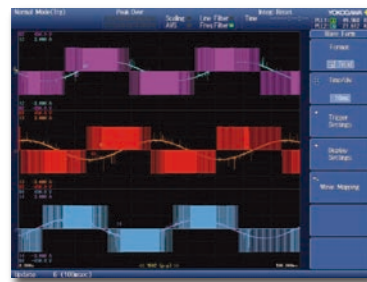

Up to the 500th order harmonic measurement (/G5 and /G6 options)

Yokogawa's previous model* provides two different measurement modes, called Normal and Harmonic, and each of the measurements is performed separately. The WT1800 makes it possible to simultaneously measure voltage, current fundamental wave, harmonic components, and harmonic distortion factor (THD) in the Harmonic measurement mode, along with the conventional voltage and current RMS values in the Normal measurement mode. You do not need to switch modes and can measure all data at high speed. In addition, up to the 500th order harmonic can be measured for fundamental frequencies.

*Comparison with Yokogawa's previous model WT1600

Simultaneous harmonic

Up to the 500th order



Boost converter efficiency and inverter efficiency evaluation

To evaluate the inputs and outputs of inverters including boost converters, at least 5 power measurement inputs are required. The WT1800 provides 6 inputs to make it possible to evaluate all aspects of inverters. In addition, a new individual null function makes it possible to set the DC offset only on a particular input channel as the null value. This makes it possible to perform more accurate measurements.

6-input

Efficiency measurement

Individual null function



Dual harmonic measurement (/G6 option)

In previous models, harmonic measurement has been limited to a single line. The WT1800 is capable of performing two-line simultaneous harmonic measurements with one unit for the first time in the industry.


The ability to simultaneously measure harmonics for the input and output signals not only reduces the switching time but also makes it possible to perform simultaneous data analysis for the input and output, which has not been possible with the previous models.

The following measurements can be performed for up to the 500th order
Single harmonic measurement (/G5 option)
Dual harmonic measurement (/G6 option)

Dual harmonic measurement

Simultaneous input/output measurement

Up to the 500th order

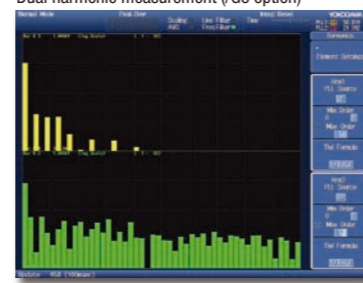

Delta computation function (/DT option)

Differential voltage/current

It is possible to obtain the differential voltage, line voltage, phase voltage, etc. by obtaining the sums and differences of instantaneous measurement values of voltage and current in each element.

Star-delta conversion

● Differential voltage/current: Differential voltage and current between two elements are computed in the three-phase three-wire system.

● Line voltage/phase current: Line voltage and phase current that are not measured are computed in the three-phase three-wire system (Figure 1).

● Star-delta conversion: Line voltage is computed from the phase voltage using the three-phase four-wire system data.

● Delta-star conversion: Phase voltage is computed from the line voltage in the three-phase three-wire system (3V3A system) (Figure 2).




Figure 1 Line voltage/phase current




Figure 2 Delta-star conversion

Typical Product Configuration

*For detailed specifications, see the page on the specifications. You need to provide a cable for voltage measurements when wiring.

Direct input measurements at less than 50 A: WT1806-06-D-HE/B5/G6/DT/V1/MTR

6 power inputs, current measurement range 10 mA to 55 A, built-in printer, dual harmonic, delta computation, RGB output, motor evaluation function

Measurements at more than 50 A using a current sensor: WT1806-60-D-HE/B5/G6/DT/V1/MTR

6 power inputs, current measurement range 100 μ A to 5.5 A (measure AC/DC current sensor output), built-in printer, dual harmonic, delta computation, RGB output, motor evaluation function

Electrical angle/rotation direction measurements of motors (/G5 and /G6 options) (/MTR option)

Electrical angle*

A motor evaluation function makes it possible to measure the rotation speed, torque, and output (mechanical power) of motors from rotation sensor and torque meter signals. The input signal from the rotation sensor and torque meter can be selected from analog signal or pulse signal.

A-, B-, and Z-phases


Furthermore, A-phase, B-phase, and Z-phase input terminals have been newly added. The A-phase and B-phase make it possible to detect the rotation direction of motors. In addition, electrical angle* can be measured using Z-phase signals.

Analog/pulse inputs

* Electrical angle measurements require the /G5 or /G6 option.
* Please purchase a torque sensor and rotation sensor separately.
Pulse/analog inputs are available for the motor evaluation function of the WT1800.


DL850 ScopeCorder

*1: Detailed switching waveforms of inverters cannot be viewed with the WT1800. If you need to verify the waveforms, you can use the DL850 ScopeCorder, which is capable of 100 MS/s, 12-bit isolated input. For details, please see Yokogawa's website or catalog (Bulletin DL850-00EN).



Support for Performance Testing of Multiple Home Appliances

*Also refer to the features of other applications.

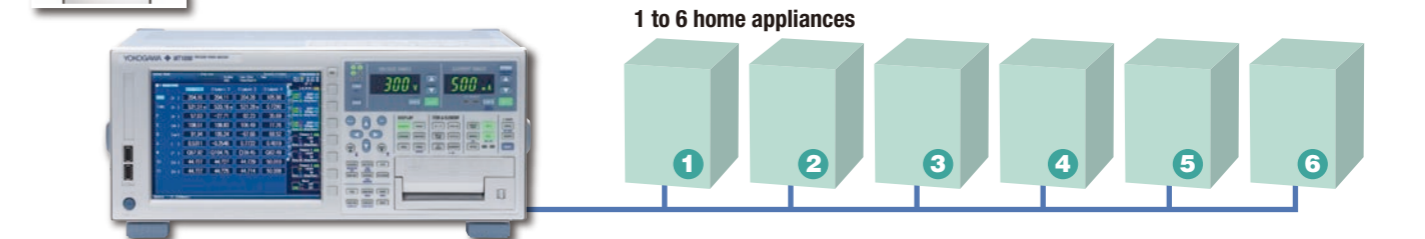

Overview

To perform high precision power evaluation on the production line, a single WT1800 unit does the work for up to six single-phase power analyzers to measure voltage, current, power, frequency, power factor, and harmonic distortion factor*. Also an independent integration function is available for each input element to start and stop integration. Since data can be collected remotely by communicating with just a single WT1800 unit, it is easy to create programs.

All-channel frequency measurement*

*The /G5 or /G6 option is required for the harmonic distortion factor measurement. Also, the /F0 option is required to measure four or more frequencies.

Advantages of WT1800


Standby and operation power measurements of up to six devices with a single unit

Power measurements of up to six devices can be performed with a single unit. In standby power measurement, 1 mA or less measurement is supported since measurements can be performed from an effective input of 1% of the small current range in the rated 10 mA range. Also, an average active power function allows you to calculate the mean power* by intermittent oscillation control signals.

*User-defined computation is used.

Standby power

Average active power



Combined use with ScopeCorder for analog output (/DA option)

20-channel output 16-bit resolution

A D/A output connector on the rear panel allows you to convert a measurement value to \pm 5 V (rated value), 16-bit high resolution DC voltage value and output it. Up to 20 items can be output simultaneously.

Also, the ability to set the upper and lower limits for an arbitrary range of input signals and scale up and down the D/A output in the range from -5 V to +5 V allows you to enlarge a changing part of the input signals to monitor it with a ScopeCorder, etc.

* 0 to 5 V is fixed for some items, such as frequency measurement.

DA zoom


Typical Product Configuration

*For detailed specifications, see the page on the specifications. You need to provide a cable for voltage measurements when wiring.

WT1806-06-M-HE/EX6/B5/G6/FQ/V1/DA: 6 power inputs, current measurement range 10 mA to 55 A, or clamp measurement (with a clamp input terminal), built-in printer, all-channel frequency measurement (\times 12), RGB output, dual harmonic, DA output *An external input terminal (EX) allows you to perform both direct input measurement and clamp measurement. *Direct input and current sensor input cannot be connected simultaneously.

Power Generation and Conversion Efficiency Measurements in New Energy Markets, including Photovoltaic and Wind Power Generation

*Also refer to the features of other applications.

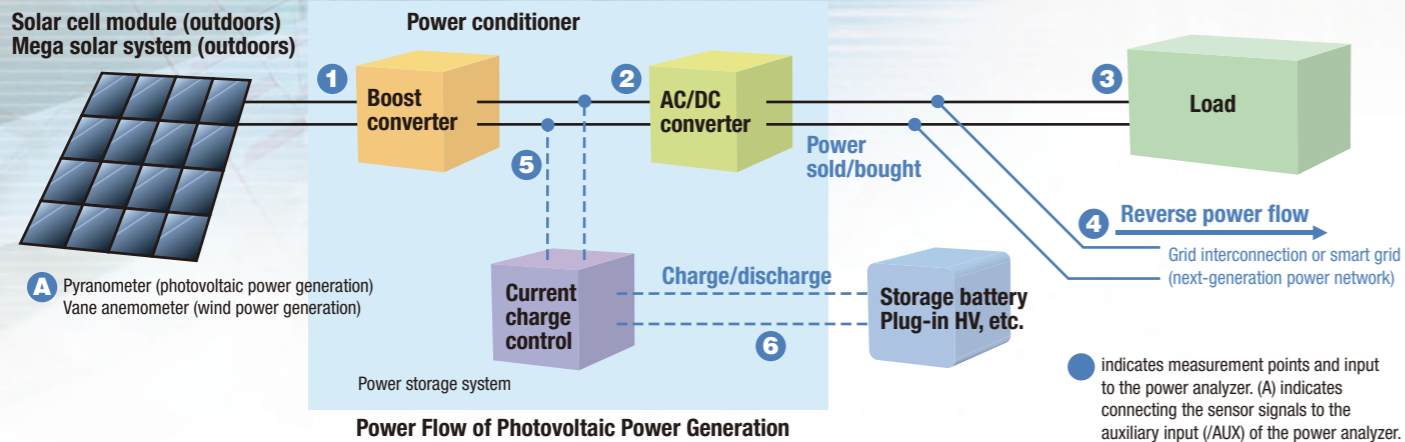

Overview Energy generated by photovoltaic cell modules and wind turbines is converted from DC to AC by a power conditioner. Furthermore, the voltage is converted by a charge control unit for the storage battery. Minimizing losses in these conversions improves efficiency in the overall energy system. The WT1800 is capable of providing up to 6 channels of power inputs per unit to make it possible to measure the voltage, current, power, and frequency (for AC) before and after each converter, as well as converter efficiency and charging efficiency.

Advantages of WT1800

Max. 1000 V/50 A × 6-line direct measurement

Wide voltage/current range

Direct input terminals in a voltage range from 1.5 V to 1000 V and current range from 10 mA to 5 A or 1 A to 50 A make it possible to perform high-precision measurements without using a current sensor.

Efficiency measurement

Furthermore, power conditioner evaluation requires multiple-channel power measurements, such as inputs/outputs from a boost converter, inverter, and storage battery. The WT1800 is capable of providing up to 6 channels of power inputs to make it possible to simultaneously perform power measurements at multiple points with one unit. In addition, two units can be operated in synchronization for multi-channel power evaluation.

Synchronized operation

Power integration (power sold and bought/charge and discharge) measurements

Power sold/bought

A power integration function makes it possible to measure the amount of power sold/bought in grid interconnection and of battery charge/discharge. The WT1800 provides a current integration (q), apparent power integration (WS), reactive power integration (WQ), as well as effective power integration capable of integration in the power sold/bought and charge/discharge modes.

Charge/discharge

Furthermore, a user-defined function makes it possible to calculate the Average active power within the integration period. This makes it possible to more accurately measure the power consumption of an intermittent oscillation control unit in which power fluctuates greatly.

Average active power

Trigger when an error occurs (User-defined event function)

Data saving when an error occurs


An event trigger function is helpful in verifying that voltage or current changes are within the design tolerance range. Setting the normal power generation range as a judgment condition (trigger) detects measurement data that falls out of that range and save it to the memory.

Maximum Power Peak Tracking (MPPT) measurement

MPPT

In photovoltaic power generation, an MPPT control is performed to effectively utilize voltage generated by photovoltaic cells in an attempt to maximize the harvested power. The WT1800 is capable of measuring not only the voltage, current, and power but also the voltage, current, and power peak values (plus (+) and minus (-) sides, respectively). Also, the maximum power peak value (plus (+) and minus (-) sides) can be measured.

Maximum power peak value

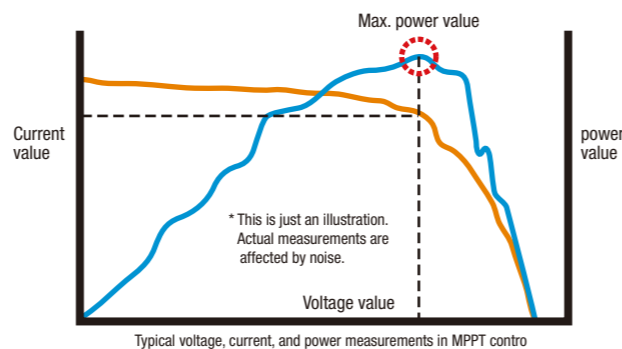

97.52 V	80.58 V
0.3166 A	0.5288 A
28.39 W	21.66 W
79.16 W	72.25 W
20.73 W	33.94 W
0.9196 W	34.02 W
50.003 W	21.612 W

Typical measurement of power value (P1), plus (+) side (P+pk) and minus (-) side (P-pk) of max. power peak value

Ripple factor and power loss measurements using user-defined function

A user-defined function makes it possible to compute not only the conversion efficiency but also the power loss, DC voltage and DC current ripple factors between the input and output. This is helpful in multiplying a factor or slightly changing the arithmetic expression according to the purpose. Up to 20 arithmetic expressions can be set. Display names for the arithmetic operations F1, F2, and so on can be changed freely.

Ripple factor

Power loss




- Typical arithmetic expressions
 1. DC voltage ripple factor = $[(\text{Voltage peak value (+)} - \text{Voltage peak value (-)}) / 2 \times \text{DC voltage value (mean)}] \times 100$
 2. Power loss = Output power - Input power

Typical Product Configuration *For detailed specifications, see the page on the specifications. You need to provide a cable for voltage measurements when wiring.

Direct input measurements at less than 50 A: WT1806-06-F-HE/EX6/B5/G6/AUX
6 power inputs, current measurement range 10 mA to 55 A, or clamp measurement (with clamp input terminals), built-in printer, dual harmonic, auxiliary input
Measurement at more than 50 A using a current sensor: WT1806-60-F-HE/EX6/B5/G6/AUX
6 power inputs, current measurement range 100 μA to 5.5 A (measure AC/DC current sensor output), external current sensor input (for clamp measurement), built-in printer, dual harmonic, external signal input
*Direct input and current sensor input cannot be connected simultaneously.

Power Measurements of Fluorescent and Light Emitting Diode (LED) Lights

*Also refer to the features of other applications.

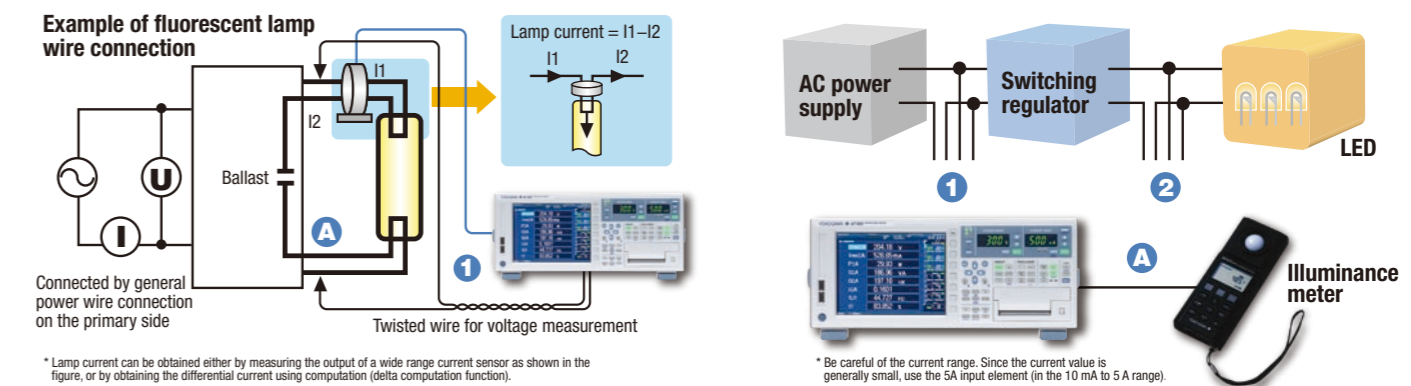

Overview Since the switching frequency of fluorescent lamp is sometimes as fast as approximately tens of kHz, a wide range power measurement is required. Also, sometimes dimming control by a PWM modulation circuit is performed for the LED lights. The WT1800 provides a wide range from DC to up to 5 MHz to allow you to evaluate these kinds of harmonic signals.

Advantages of WT1800

Tube current measurements of fluorescent lamps (DT option)

A ballast uses harmonic frequency signals to illuminate the fluorescent lamp. The frequency is generally as fast as tens of kHz. A wide range capability of power measurement is important to reliably capture the signals. Also, since tube current cannot be measured directly, it is obtained either by measuring the difference between the output current of the ballast and the cathode current using a current sensor, or by using the delta computation of the WT1800 (DT option).

Note: Tube current is obtained by the computation of a difference in the instantaneous values instead of the effective current values.



5 MHz range

Tube current measurement

Delta computation Differential current

Light emitting efficiency and power measurements of LED lights (AUX option)

It is important for LED lights to increase the light emitting efficiency while at the same time reducing the current and power consumption. The WT1800 allows you to measure voltage, current, and power, as well as compute the light emitting efficiency (lamp efficiency) by connecting the output of an illuminance meter, etc. to the external signal input terminal (AUX option).

DC/AC


Light emitting efficiency



Typical Product Configuration *For detailed specifications, see the page on the specifications. You need to provide a cable for voltage measurements when wiring.

WT1806-06-H-HE/EX6/G6/DT/DA: 6 power inputs, current input range 10 mA to 55 A, or clamp measurement (with a clamp input terminal), dual harmonic, delta computation (differential current measurement), DA output *Direct input and current sensor input cannot be connected simultaneously.

Input/Output Efficiency Measurements of Inverter Motors for Hybrid Electric Vehicles (HEV), Electric Vehicles (EV), and Plug-in Hybrid Electric Vehicles (PHEV)

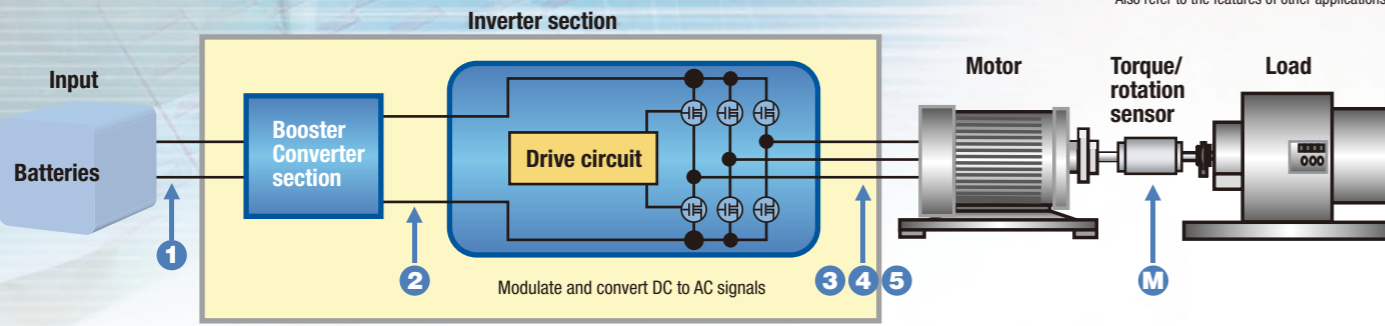

Overview The WT1800's ability to perform up to 6 power input measurements makes it possible to evaluate the battery's charge and discharge characteristics, and test and evaluate the efficiency between the input and output of inverters. A motor evaluation function (MTR option) makes it possible to simultaneously monitor changes in the voltage, current, and power, as well as changes in the rotation speed and torque.

Advantages of WT1800



Inverter, motor, and DC/DC converter efficiency measurements

A single WT1800 unit is capable of measuring the effective power, frequency, and motor output in order to measure the total efficiency, including inverter and motor efficiency and battery DC/DC conversion efficiency. DC power accuracy has been improved to $\pm 0.05\%$ to ensure more accurate measurements.



Offset correction measurement by null function

Null After you finish connecting the wires for inverter motor testing, you may find a value will not become zero due to the influence of the ambient environment or other reasons and the offset value will be applied inappropriately even before starting measurements.
Individual offset adjustment With the previous power analyzer model*, there is no choice other than to turn all inputs on and off collectively, so unintended offset adjustment is performed even for inputs for which you do not want adjust. With the WT1800, only an input for which you want to perform offset adjustment can be turned on and off.

*Comparison with Yokogawa's previous model WT1600


Harmonic measurements from a 0.5 Hz low frequency (/G5 and /G6 options)

In motor testing, evaluation is performed at various rotation speeds from low to high speeds. The WT1800 supports the lower limit frequency of 0.5 Hz to make it possible to measure harmonics at a very low motor rotation speed without using an external sampling clock.



Battery charge and discharge measurements

In integrated measurement, the battery charge and discharge can be evaluated. Instantaneous positive and negative values captured at an approximately 2 MS/s high-speed sampling rate are integrated, respectively, and each of the total values is displayed.

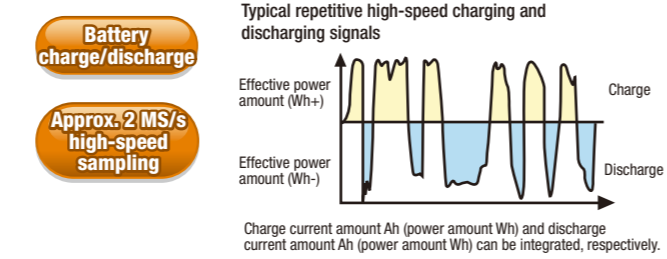

DA output and remote control (/DA option)

20-channel output Sometimes you may want to check changes in data, along with other measurement data (temperature, etc) at the same time when you acquire communication data, such as voltage, current, power, and efficiency data. A DA output function allows you to retrieve analog signals on up to 20 channels.
Integration by remote control Also, remote control signals make it possible to control the start, stop, and reset of integration by external analog signals. Furthermore, integration can be linked by inputting an analog trigger signal from another device.

Harmonic Measurements of Aircraft Power Systems

Overview High order harmonic measurements are important in the aircraft industry. The WT1800 provides a function to measure up to 150 kHz harmonics and allows you to measure up to the 500th order harmonic.

Advantages of WT1800

Measurement of up to the 255th order component even at a 1 kHz fundamental wave (/G5 and G/6 options)

Up to the 500th order harmonic can be measured at a 400 Hz fundamental frequency. Also, up to the 255th order harmonic can be measured at 1 kHz. Up to 150 kHz harmonic measurements are supported for aircraft testing that requires high order harmonic measurements.




Typical Product Configuration *For detailed specifications, see the page on the specifications. You need to provide a cable for voltage measurements when wiring.

WT1806-60-H-HE/G6/DA: 6 power inputs, current input range 100 μ A to 5.5 A (measurement using a current sensor), dual harmonic, DA output

NEW Fast Data Capturing performance

ms response capability (/HS Option)

ms response A New High Speed data capturing /HS option can measure Σ Urms, Σ Irms and Σ P from single phase (DC signal) and three phase devices every 5 ms (When External Synchronization is OFF) or, 1 ms to 100 ms when External Synchronization is ON (depending on the frequency of the clock signal). It outputs data in 1 s blocks to internal/external memory or to a PC through a communications interface.
HS filter The average characteristic is set using the cutoff frequency of the HS filter for measured data during 5 ms or 1 ms to 100 ms period. The cutoff frequency can be varied from 1 Hz to 1,000 Hz in 1 Hz steps.

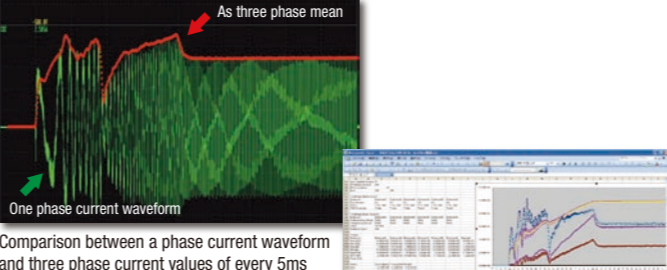

Comparison between a phase current waveform and three phase current values of every 5ms
 Data analysis and graph drawing by data calculation software

Power Measurements of Green IT Data Center Servers

Overview New large data centers based on cloud computing are being constructed while the importance of energy conservation is growing. Since the WT1800 is capable of measuring up to 6 power inputs, the current and power consumption of up to six servers can be measured with a single unit. The standard GP-IB, USB, and Ethernet communication functions allow the operator to monitor data in multiple locations by collecting data via communication.

Advantages of WT1800

Integrated Power and Harmonic Distortion Factor Measurements

The WT1800 is capable of measuring long hours of integrated current (Ah) and power (Wh) in order to understand the amount of power consumption. It is not only possible to measure 50/60 Hz AC signals, but also perform high precision DC measurement indispensable for the DC power supply evaluation. Also, the /AUX option input allows you to monitor heat generation, etc. In addition, a DA output function (/DA option) allows you to output analog signals to an external recorder (ScopeCorder, etc.) and perform long hours of monitoring of current and power along with the temperature and other data.



Typical Product Configuration *For detailed specifications, see the page on the specifications. You need to provide a cable for voltage measurements when wiring.


WT1806-06-H-HE/EX6/G6/DA: 6 power inputs, current input range 10 mA to 55 A, or clamp measurement (with a clamp input terminal), dual harmonic, DA output

*An external input terminal (EX) allows you to measure both direct input measurement and clamp measurement. *Direct input and current sensor input cannot be connected simultaneously.

760122 WTViewer Software

Multi-channel synchronized measurements using WTViewer

Two-unit synchronized operation WTViewer is application software that allows you to read numerical data measured with a WT1800 Precision Power Analyzer to a PC via Ethernet, GP-IB, or USB communication, and display and save the numerical values.
12-power measurements Up to 12 power inputs can be measured simultaneously in synchronized measurements between two units. Also, the ability to collect data of up to four WT1800 units allows you to measure the conversion efficiency, power, and power loss of up to 24 power inputs.

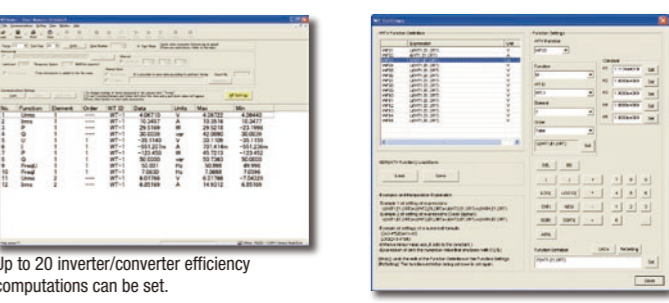

Up to 20 inverter/converter efficiency computations can be set.
 • Computation setting examples
 Inverter discharge efficiency ID1P Σ A/ID1P Σ A \times 100[%],
 Converter charge efficiency ID2P1/D2P Σ A \times 100[%]
 Inverter charge efficiency ID1P1/ID1P Σ A \times 100[%], Motor efficiency ID1Pm/ID1P Σ A \times 100[%]

	Measurable number of units	FTP server function
GP-IB connection	1 to 4 units	×
Ethernet communication	1 to 4 units	○
USB communication	1 to 4 units	×

*Memory media (USB storage device) is required.

Comparison between WT1600 and WT1800

Comparison with the previous model (main changes)


Table comparing WT1800 and WT1600 specifications across various categories like Voltage input terminal, Current input terminal, Frequency range, etc.

* There are restrictions on some specifications and functions. For details, refer to the specifications. * A table comparing commands between the two models will be published on the Products page of the Yokogawa website.


Characteristics comparison

Examples of frequency characteristics of the WT series and the PZ4000


Examples of frequency and power accuracy characteristics

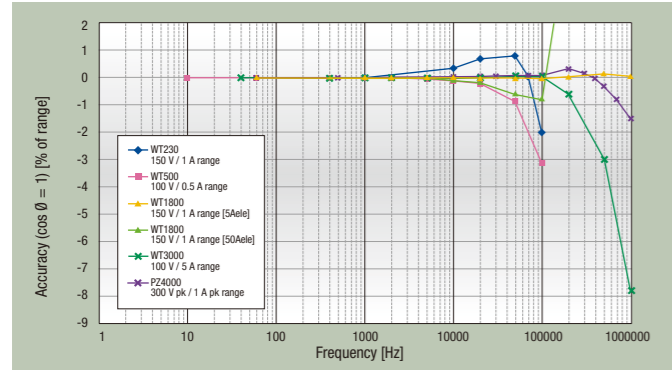


Total power error with rated range input for an arbitrary power factor (at 50/60 Hz)

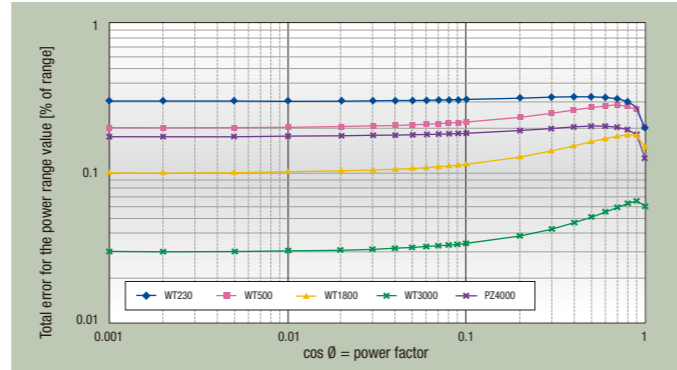

Influence of the common-mode voltage on the readings

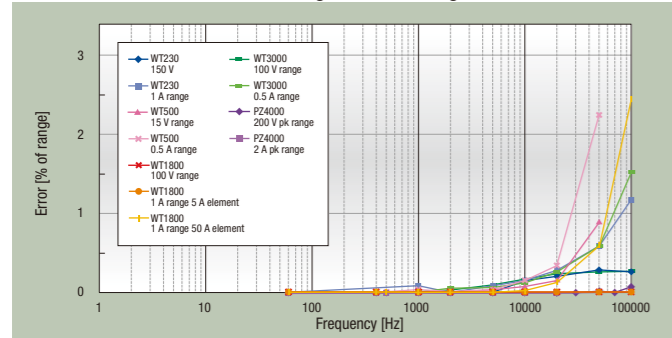

Example of the frequency and power accuracy for zero power factor

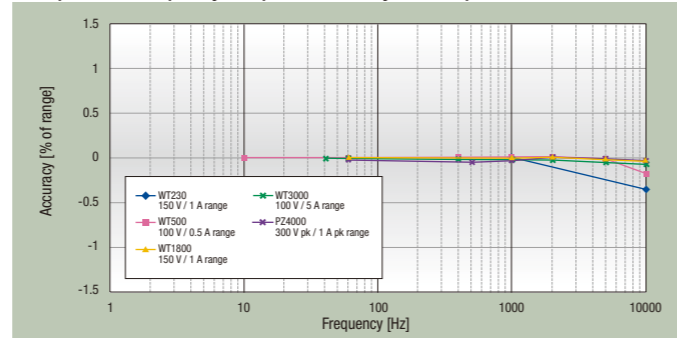


Comparison of Power Analyzer WT Series and PZ

Comparison of the specifications and functions of the WT series and the PZ4000




Large table comparing specifications and functions of WT series (WT1800, WT3000, WT500, WT210/WT230) and PZ4000 across categories like Input, Measurement parameters, Display, and Other features.

There are limitations on some specifications and functions. See the individual product catalogs for details. (opt.) : Optional

Comparison of the accuracy and range between the WT series and PZ

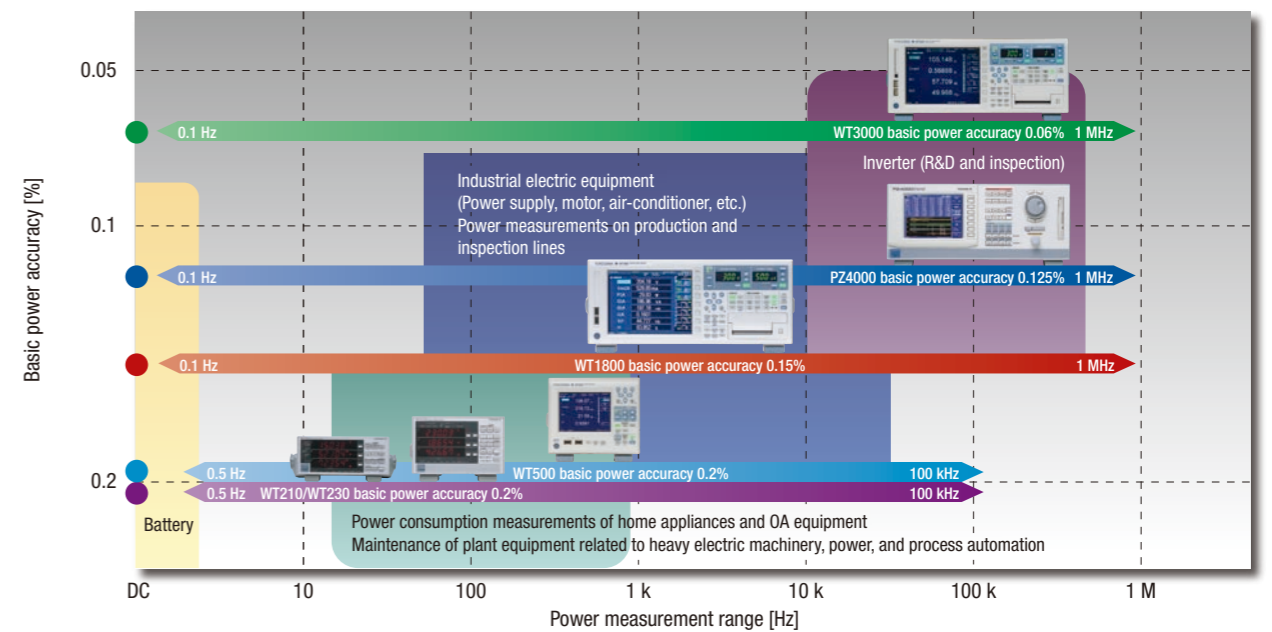

Typical Voltage/Current Connections

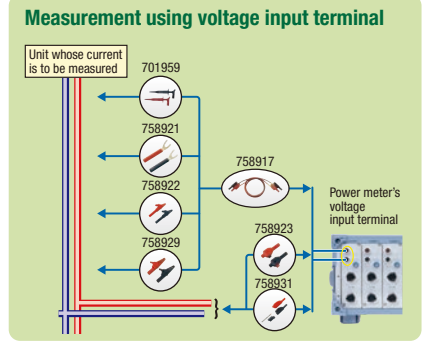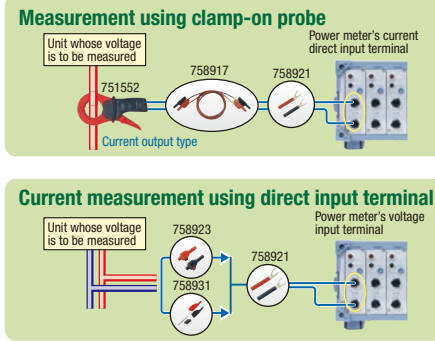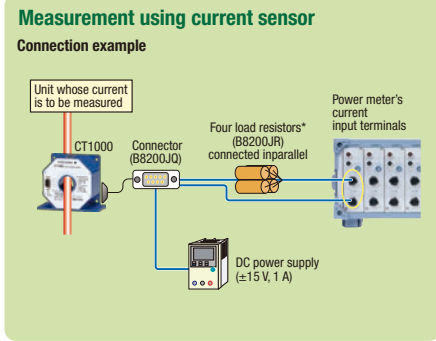

* A burden resistor is required for the CT1000, CT200, CT60, and 751574.

Model and Suffix Codes

Model	Suffix codes	Description
WT1801	-01	WT1800 Single input element
	50 A	
	5 A	
WT1802	WT1800 2 input elements	
	-02	50 A 50 A
	-11	5 A 50 A
	-20	5 A 5 A
WT1803	WT1800 3 input elements	
	-03	50 A 50 A 50 A
	-12	5 A 50 A 50 A
	-21	5 A 5 A 50 A
	-30	5 A 5 A 5 A
WT1804	WT1800 4 input elements	
	-04	50 A 50 A 50 A 50 A
	-13	5 A 50 A 50 A 50 A
	-22	5 A 5 A 50 A 50 A
	-31	5 A 5 A 5 A 50 A
	-40	5 A 5 A 5 A 5 A
WT1805	WT1800 5 input elements	
	-05	50 A 50 A 50 A 50 A 50 A
	-14	5 A 50 A 50 A 50 A 50 A
	-23	5 A 5 A 50 A 50 A 50 A
	-32	5 A 5 A 5 A 50 A 50 A
	-41	5 A 5 A 5 A 5 A 50 A
	-50	5 A 5 A 5 A 5 A 5 A
WT1806	WT1800 6 input elements	
	-06	50 A 50 A 50 A 50 A 50 A 50 A
	-15	5 A 50 A 50 A 50 A 50 A 50 A
	-24	5 A 5 A 50 A 50 A 50 A 50 A
	-33	5 A 5 A 5 A 50 A 50 A 50 A
	-42	5 A 5 A 5 A 5 A 50 A 50 A
	-51	5 A 5 A 5 A 5 A 5 A 50 A
-60	5 A 5 A 5 A 5 A 5 A 5 A	
Standard option		
Power cord	-D	UL/CSA standard
	-F	VDE standard
	-R	AS standard
	-Q	BS standard
	-H	GB standard
Languages	-HE	English menu
	-HG	German menu
	-HC	Chinese menu
Additional option		
Options	/EX1	External current sensor input for WT1801
	/EX2	External current sensor input for WT1802
	/EX3	External current sensor input for WT1803
	/EX4	External current sensor input for WT1804
	/EX5	External current sensor input for WT1805
	/EX6	External current sensor input for WT1806
	/B5	Built-in printer
	/G5	Harmonic Measurement
	/G6	Simultaneous Dual Harmonic Measurement
	/DT	Delta Computation
	/FQ	Add-on Frequency Measurement
/V1	RGB output	
/DA	20-channel DA Outputs	
/MTR	Motor Evaluation Function	
/AUX	Auxiliary Sensor Inputs	
/HS	High speed data capturing	

* The numbers in the "Description" column have the following meanings.
50 A: 50 A input element, 5 A: 5 A input element
Elements are inserted in the order shown starting on the left side on the back.
* GPIB, Ethernet and USB communication come standard.

Note: Adding input elements after initial product delivery will require rework at the factory. Please choose your models and configurations carefully, and inquire with your sales representative if you have any questions

Standard accessories
Power cord, Rubber feet, current input protective cover, User's manual, expanded user's manual, communication interface user's manual, printer roll paper (provided only with /B5), connector (provided only with /DA) Safety terminal adapter 758931 (provided two adapters in a set times input element number)

User's manuals [Start guide (booklet), function /operation, communication manuals (electric file)]

Accessory (sold separately)

Model/parts number	Product	Description	Order Q'ty
758917	Test read set	A set of 0.8 m long, red and black test leads	1
758922	Small alligator-clip	Rated at 300 V and used in a pair	1
758929	Large alligator-clip	Rated at 1000 V and used in a pair	1
758923	Safety terminal adapter	(spring-hold type) Two adapters to a set	1
758931	Safety terminal adapter	(screw-fastened type) Two adapters to a set 1.5 mm hex Wrench is attached	1
758921	Fork terminal adapter	Banana-fork adapter, Two adapters to a set	1
701959	Safety mini-clip	Hook type, Two in a set	1
758924	Conversion adapter	BNC-banana-jack (female) adapter	1
366924	BNC-BNC cable	1 m	1
366925	BNC-BNC cable	2 m	1
B9284LK	External sensor cable	Current sensor input connector, Length 0.5 m	1
B9316FX	Printer roll paper	Thermal paper, 10 meters (1 roll)	10

▲ Due to the nature of this product, it is possible to touch its metal parts. Therefore, there is a risk of electric shock, so the product must be used with caution.
* Use these products with low-voltage circuits (42 V or less).

Rack Mount

Model	Product	Description
751535-E4	Rack mounting kit	For EIA
751535-J4	Rack mounting kit	For JIS

CT1000 AC/DC Current sensor

Current: 1000 Apk
Basic Accuracy:
 $\pm(0.05\% \text{ of rdg} + 30 \mu\text{A})$
Measurement Range:
DC to 300 kHz
Input/output ratio: 1500: 1



751574 Current transducer

Current: 600 Apk
Basic Accuracy:
 $\pm(0.05\% \text{ of rdg} + 40 \mu\text{A})$
Measurement Range:
DC to 100 kHz
Input/output ratio: 1500: 1



CT200 AC/DC Current sensor

Current: 200 Apk
Basic Accuracy:
 $\pm(0.05\% \text{ of rdg} + 30 \mu\text{A})$
Measurement Range:
DC to 500 kHz
Input/output ratio: 1000: 1




CT60 AC/DC Current sensor

Current: 60 Apk
Basic Accuracy:
 $\pm(0.05\% \text{ of rdg} + 30 \mu\text{A})$
Measurement Range:
DC to 800 kHz
Input/output ratio: 600: 1



Exterior WT1800

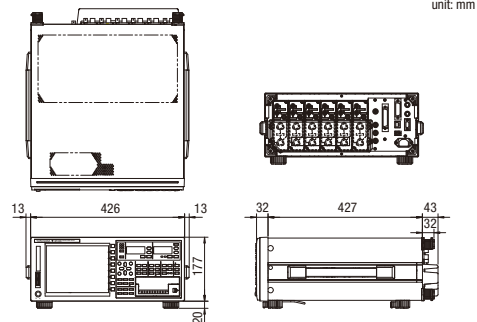

Yokogawa's Approach to Preserving the Global Environment

- Yokogawa's electrical products are developed and produced in facilities that have received ISO14001 approval.
- In order to protect the global environment, Yokogawa's electrical products are designed in accordance with Yokogawa's Environmentally Friendly Product Design Guidelines and Product Design Assessment Criteria.

NOTICE

- Before operating the product, read the user's manual thoroughly for proper and safe operation.
- If this product is for use with a system requiring safeguards that directly involve personnel safety, please contact the Yokogawa sales offices.

YOKOGAWA

YOKOGAWA METERS & INSTRUMENTS CORPORATION

Global Sales Dept. /Phone: +81-42-534-1413 Facsimile: +81-42-534-1426

E-mail: tm@cs.jp.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA

YOKOGAWA EUROPE B.V.

YOKOGAWA ENGINEERING ASIA PTE. LTD.

Phone: (1)-770-253-7000, Fax: (1)-770-254-0928

Phone: (31)-88-4641000, Fax: (31)-88-4641111

Phone: (65)-62419933, Fax: (65)-62412606

Subject to change without notice.

[Ed : 02/b] Copyright ©2011

Printed in Japan, 108(KP)

nbn

ELEKTRONIK AG

nbn Elektronik AG
Birmensdorferstrasse 30
CH-8142 Uitikon

Tel. +41 (0)44 404 34 34
Fax +41 (0)44 493 50 32
info@nbn-elektronik.ch
www.nbn-elektronik.ch